

# DOOR PHONE

For PBX

## SLIM DOOR PHONE



- Very slim: 16 mm
- PBX / Wireless\* connexion
- PC configuration / DTMF code
- 1 / 2 / 4 buttons

### SLIM DOOR PHONE: simple.

**SLIM Door phone** can be connected as well on **PBX FxS** or on **analog PSTN line**.

**SLIM Door Phone** associated with our **DECT BOX GAP** allows a **wireless connexion** to any proprietary **GAP DECT base and DECT GAP phone**.

The **SLIM Door phone** is easy to install outdoor and indoor. It offers 3 models, with **1, 2 or 4 buttons**.

**SLIM Door phone** is provided with a relay for lock control, a blue **backlit case** and a **heating system**.

The **USB connexion** and the **supplied programming interface** for Windows make the **SLIM Door phone** easy to configure.

### Advantages

- o PBX FxS / Analog PSTN line connexion
- o 1 / 2 / 4 buttons
- o PC configuration by USB local connexion
- o Remote programming by DTMF code
- o 1 relays door control
- o Blue backlit case
- o Heating system
- o Flash / Pause / Tones programmable
- o SLIM 2 & 4 buttons can be programmed with 3 combinations (day, night, night/day) of 6 digits to control the lock.
- o Day & night service management
- o Compatible with all PBX
- o Strong casing





## Characteristics

- ✚ **Power supply**  
- **12 V AC or 12 V DC.** is used for back-lighting, heating system and door control relay.  
- For the conversations, the door phone is powered by the PSTN line.
- ✚ **Consumption**  
300mA max
- ✚ **Relay** for electric or magnetic lock  
Maximum voltage : 48V  
Maximum intensity : 1A

- ✚ **Working temperature**  
-20°C / +70°C
- ✚ **Dimensions**  
104 x 153 x 16 mm
- ✚ **Weight**  
360g
- ✚ **Casing material**  
Aluminium Elox and Plexiglass
- ✚ **Programming**  
- PC configuration by USB local connexion  
- Remote programming by DTMF code




## Models

- ✚ **SDP 1 button**
- ✚ **SDP 2 buttons**
- ✚ **SDP 4 buttons**



## Functioning

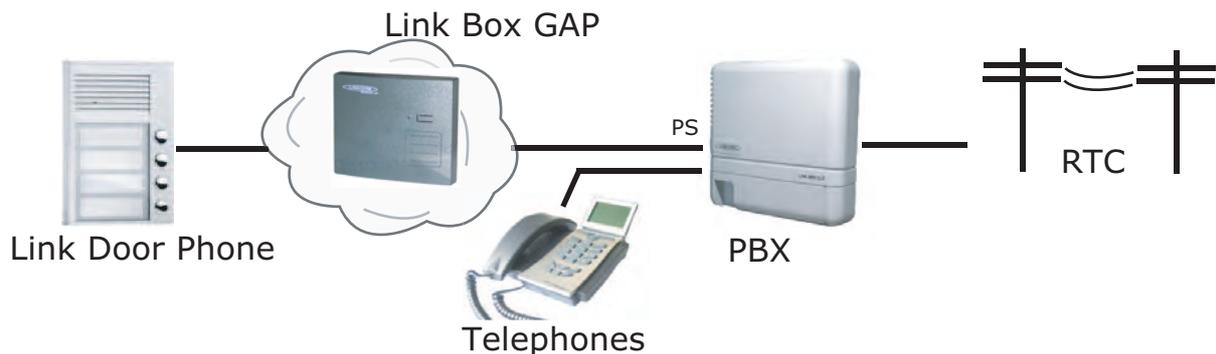

## Configuration

- ✚ Slim Door Phone can be programmed remotely by DTMF code, or with its Windows interface (USB port needed).
- ✚ The supplied interface allows programming easily and quickly the door phone.
- ✚ Indeed, in addition to the phone numbers entry, it is possible to configure all the using door phone codes (eg: lock opening code), the relay switching mode, and also technical parameters as Flash duration, Pause, DTMF tone ...
- ✚ This software even allows you editing and printing labels to stick on the door phone front.

